
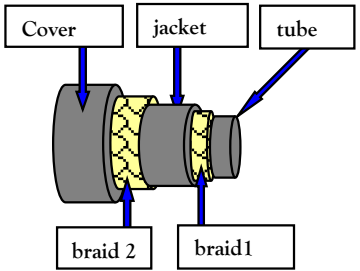


SUMITOMO RIKO GROUP  SumiRiko Italy S.p.A.		<b>SumiRiko 3518W-12 mm</b>			
<p><b>Very High Pressure Power Steering Hose</b></p> <p><b>MAX WORKING PRESSURE 300 Bar</b></p>					
<b>Construction and material:</b>					
Cover	CSM				
Braid 2	Aramid				
Jacket	CSM				
braid 1	Aramid				
tube	CSM				
<b>Hose dimension*:</b>					
ID [mm]	11,5, 12,5				
OD [mm]	20,5 - 22,0				
Concentricity [mm max]	0,4				
<b>Mechanical characteristics:</b>					
Max Working pressure [bar]	300				
Max Working temperature [C°]	140 (peak 150)				
Min Working temperature [C°]	-40				
Burst pressure resistance [bar]	> 900				
Volumetric expansion					
Adhesion	>2.5 N/mm				
Ozone resistance	No crack (72 h/ 100 ppcm at 40°)				
<b>Standard and :</b>					
Product	Minimum batchs		Minimum lenghts		Preformed
International standard					
Standard - Customers	IVECO 18-0400				
* eventuals request to discuss with the customer					