


High Pressure Power Steering Hose
 STANDARD APPLICATIONS

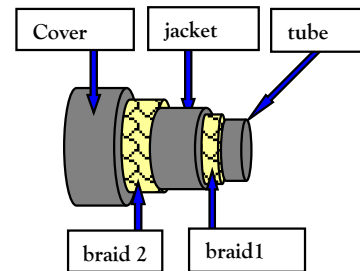

Construction and material:

Cover	CSM
Braid 2	PA
Jacket	NBR
braid 1	PA
tube	CSM

Hose dimension*:

ID [mm]	9.5 - 10.3
OD [mm]	19.2 - 20.4
Concentricity [mm max]	0,6

Mechanical characteristics:

Max Working pressure [bar]	110
Max Working temperature [C°]	140 (peak 150)
Min Working temperature [C°]	-40
Burst pressure resistance [bar]	> 600
Volumetric expansion	16 to 24 cc/m @90bar
Adhesion	>2.5 N/mm
Ozone resistance	No crack (72 h/ 100 ppcm at 40°)

Standard and :

Product	Minimum batchs		Minimum lenghts		Preformed	
International standard	SAE J 188 type 1					
Standard - Customers	NTF Anoflex					

* eventuals request to discuss with the customer