


High Pressure Power Steering Hose

STANDARD APPLICATIONS

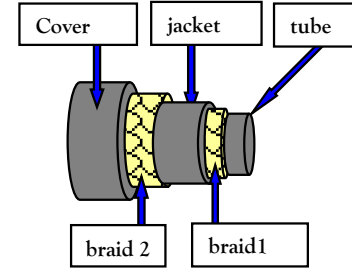

Construction and material:

Cover	CSM
Braid 2	PA
Jacket	NBR
braid 1	PA
tube	CSM

Hose dimension*:

ID [mm]	9.5 - 10.3
OD [mm]	17.6 - 18.6
Concentricity [mm max]	0,6

Mechanical characteristics:

Max Working pressure [bar]	110
Max Working temperature [C°]	140 (peak 150)
Min Working temperature [C°]	-40
Burst pressure resistance [bar]	> 550
Volumetric expansion	10 to 26 cc/m @ 50 bar - 20 to 26 cc/m @100bar
Adhesion	>2.5 N/mm
Ozone resistance	No crack (72 h/ 100 ppcm at 40°)

Standard and :

Product	Minimum batchs		Minimum lenghts		Preformed	
International standard	SAE J 188 type 1					
Standard - Customers	9.02138/02 Fiat // NTF Anoflex // MS.50029 FCA					

* eventuals request to discuss with the customer