


SUMITOMO RIKO GROUP

SumiRiko Italy S.p.A.

SumiRiko LEVII / Hybrid with OBD Pump

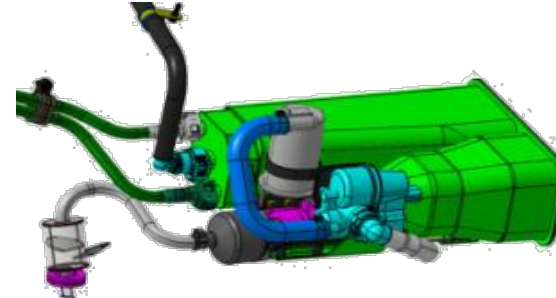

Construction and material:

| | |
|---------------------------|---------------------------------|
| Housing/ Material | 2 chambers / material (PA66) |
| Charcoal Type | 3.15lt BWC 14 + 11 Pellet + HCA |
| Felts | n° 2 |
| Dip pipe | Yes |
| Retention Charcoal system | Springs, grids and felts |
| OBD System | Bosch pump + filter |

Canister characteristics:

| | |
|----------------------------|------------------------|
| NWC [grams] | > 180 gr |
| Pressure Drop [Adsorption] | < 15 mbar @ 60 SI/min. |
| Pressure Drop [Desorption] | < 20 mbar @ 60 SI/min. |
| Emission requirements | LEV II |

Standard and :

| | | | | | | |
|------------------------|------------------------|-----|-----------------|-----|-----------|-----|
| Product | Minimum batch | N/A | Minimum lengths | N/A | Preformed | N/A |
| International standard | CARB LEV II - EPA ORVR | | | | | |
| Standard - Customers | Ferrari - Fiat 9.2258 | | | | | |