
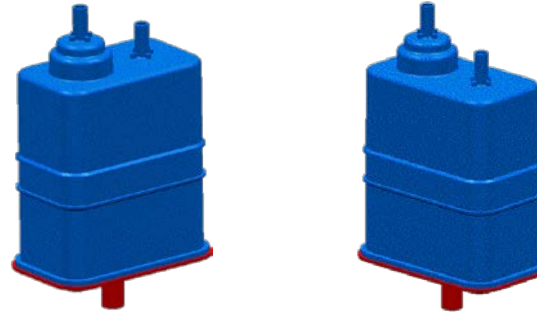


SUMITOMO RIKO GROUP

SumiRiko Italy S.p.A.

SumiRiko Motorcycle

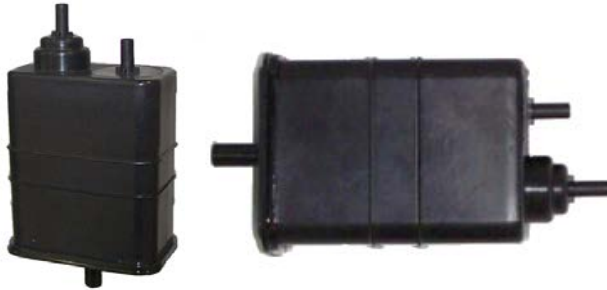

Construction and material:

Housing/ Material	Open bottom / material (PA6, PA6 + GF)
Charcoal Type	0.4 It Pellet BWC 15
Felts	n° 2
Retention Charcoal system	Spring, grid and foam
Valves	Optional (inlet or outlet pipe)

Canister characteristics:

NWC [grams]	> 15
Pressure Drop [Adsorption]	26 mbar @ 60 Slit/min.
Pressure Drop [Desorption]	16 mbar @ 41 Slit/min.
Emission requirements	CARB Motorcycle

Standard and :

Product	Minimum batch	N/A	Minimum lenghts	N/A	Preformed	N/A
International standard	CARB Motorcycle					
Standard - Customers	Piaggio - Ducati					