
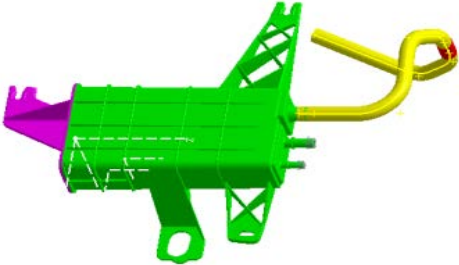
		<b>SumiRiko EURO V-VI</b>					
							
<b>Construction and material:</b>							
<b>Housing Material</b>	2 chambers / material (PP + GF)						
<b>Charcoal Type</b>	1.35lt BWC 11 Pellet						
<b>Felts</b>	2 (welded)						
<b>Dip pipe</b>	Yes						
<b>Retention Charcoal system</b>	Spring, grid and felt						
<b>Canister characteristics:</b>							
<b>GWC [grams]</b>	> 62 gr						
<b>Pressure Drop [Adsorption]</b>	≤ 15 mbar @ 800 Sl/h						
<b>Pressure Drop [Desorption]</b>	≤ 12.5 mbar @ 1750 Sl/h						
<b>Emission requirements</b>	Euro 2000						
<b>Standard and :</b>							
<b>Product</b>	<b>Minimum batch</b>	<b>N/A</b>	<b>Minimum lengths</b>	<b>N/A</b>	<b>Preformed</b>	<b>N/A</b>	
<b>International standard</b>	<b>Euro 2000</b>						
<b>Standard - Customers</b>	<b>PSA B22 2670</b>						