


SUMITOMO RIKO GROUP

SumiRiko Italy S.p.A.

SumiRiko LEVII Hybrid with OBD Pump

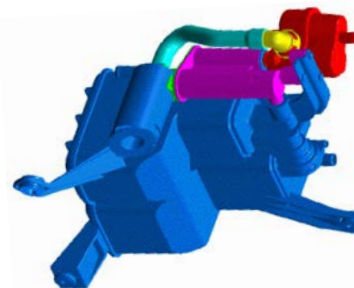

Construction and material:

Housing/ Material	4 chambers / material (PA66 + GF) + HCA Device
Charcoal Type	4.3lt BWC 11 Pellet + HCA
Felts	n° 4
Dip pipe	Yes
Retention Charcoal system	Springs, grids and felts
OBD System	Continental pump + filter

Canister characteristics:

NWC [grams]	> 170 gr
Pressure Drop [Adsorption]	< 15 mbar @ 60 Slit/min.
Pressure Drop [Desorption]	< 30 mbar @ 60 Slit/min.
Emission requirements	CARB LEV II

Standard and :

Product	Minimum batch	N/A	Minimum lenghts	N/A	Preformed	N/A
International standard	CARB LEV II - EPA ORVR					
Standard - Customers	AUDI (VW TL82019)					