


SUMITOMO RIKO GROUP

SumiRiko Italy S.p.A.

SumiRiko 3125 W-10 mm

High Pressure Power Steering Hose

MAX WORKING PRESSURE 130 Bar

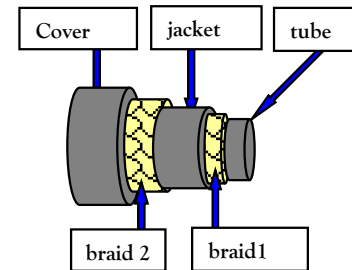

Construction and material:

Cover	CSM
Braid 2	PA
Jacket	NBR
braid 1	PA
tube	CSM

Hose dimension*:

ID [mm]	9.6 - 10.4
OD [mm]	19.7 - 20.7
Concentricity [mm max]	0,6

Mechanical characteristics:

Max Working pressure [bar]	130 (peak 140)
Max Working temperature [C°]	140 (peak 150)
Min Working temperature [C°]	-40
Burst pressure resistance [bar]	> 700
Volumetric expansion	26+/-3 cc/m @100bar
Adhesion	>2.5 N/mm
Ozone resistance	No crack (72 h/ 100 ppcm at 40°)

Standard and :

Product	Minimum batchs		Minimum lenghts		Preformed	
International standard	SAE J 188 type 1					
Standard - Customers	AKLH03 Audi					

* eventuals request to discuss with the customer