
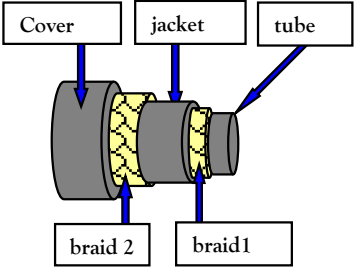
 SUMITOMO RIKO GROUP  SumiRiko Italy S.p.A.		SumiRiko 3398 W-10 mm			
High Pressure Power Steering Hose STANDARD APPLICATIONS					
Construction and material:					
Cover	CSM				
Braid 2	PA				
Jacket	NBR				
braid 1	PA				
tube	CSM				
Hose dimension*:					
ID [mm]	9.5 - 10.15				
OD [mm]	17.7 - 18.5				
Concentricity [mm max]	0,6				
Mechanical characteristics:					
Max Working pressure [bar]	130				
Max Working temperature [C°]	140 (peak 150)				
Min Working temperature [C°]	-40				
Burst pressure resistance [bar]	> 600				
Volumetric expansion	14 to 20 cc/m @100bar				
Adhesion	>2.5 N/mm				
Ozone resistance	No crack (72 h/ 100 ppcm at 40°)				
Standard and :					
Product	Minimum batchs		Minimum lenghts		Preformed
International standard	SAE J 188 type 1				
Standard - Customers	Ford ES-6W83-3A719AA /// S98AG3A719AB // GMW14600				
* eventuals request to discuss with the customer					